
# Manual size A4: Front page



# GK978 - Plate



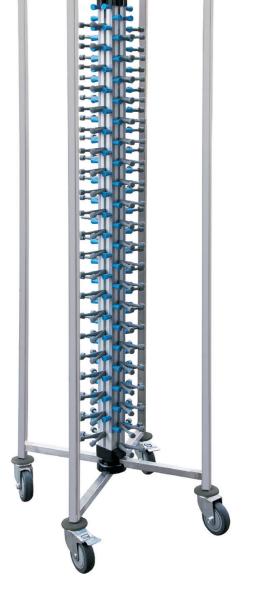

UK	0845 146 2887	Fourth Way, Avonmouth, Bristol, BS11 8TB United Kingdom
NL	0800 – 29 1 29	
	040 – 2628080	
FR	0800 - 29 2 29	
	01 60 34 28 80	
DE	0800 - 1860806	
IT	N/A	
ES	901-100 133	
PT	vendas@nisbets.pt	
AU	1300 225 960	15 Badgally Road, Campbelltown, 2560, NSW, Australia

## **Mounting castors**

- 1. Remove all packaging materials. Then extend the main part fully.
- 2. Install the castors as shown (Fig.1 and Fig.2), ensuring the braked castors are on the same frame at





# Adjusting the peg height


- 1. Place a plate to test if the peg height is proper.
- 2. If the plate is inclined, the peg is too loose. Turn the corresponding adjuster screw clockwise until the plate is level and stable (Fig. 3).
- 3. It is recommended to place plates of same size into the peg arms of same set vertically.

### Notes for use:

### **Important:**

- Adjust the peg to proper height by turning the adjuster screw at the top (There are 4 screws and 4 sets of peg arms in total, with each screw responsible for adjusting corresponding set of peg arms vertically).
- Do not overload the rack as this will cause the arms to bow.
- Position and use on a flat, stable surface.
- Children should be supervised to ensure that they do not play with the appliance.
- When not in use, ensure to set the brakes on the castors to keep the trolley locked in place.
- **Daily cleaning:** Wipe clean with a damp cloth.
- **Stubborn stain:** With a clean cloth soaked in a mild soap solution, gently remove the stain.





GK978\_A4\_v2\_20190416.indd 1 2019/4/16 10:47