THUE REFRIGERATION

UK Tel +44 (0) 1709 888 080 • Germany Tel +49 (0) 7622 6883 0 Australia Tel +61 2 9618 9999 • www.truemfg.com



Model: TSSU-27-08-HC

Food Prep Table:


Solid Door Sandwich/Salad Unit with Hydrocarbon Refrigerant



TSSU-27-08-HC

- True's salad/sandwich units are designed with enduring quality that protects your long term investment.
- Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydrocarbon refrigerant that has zero (0) ozone depletion potential (ODP), and three (3) global warming potential (GWP).
- Patented forced-air design holds 0.5°C to 5°C product temperature in food pans and cabinet interior.
- Complies with ANSI/NSF-7.
- All stainless steel front, top and ends. Corrosion resistant GalFan coated steel back.
- Stainless steel, patented, foam insulated lid and hood keep pan temperatures colder, lock in freshness and minimize condensation. Removable for easy cleaning.
- Interior attractive, NSF approved, clear coated aluminum liner. Stainless steel floor with coved corners.
- 11¾" (299 mm) deep, ½" (13 mm) thick, full length removable cutting board included. Sanitary, high density, NSF approved white polyethylene provides tough preparation surface.
- Heavy duty PVC coated wire shelves.
- Foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

PLAN VIEW

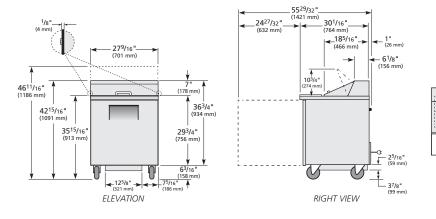

Ï					

PAN LAYOUT

ROUGH-IN L Voltage: 220-			Cl	nart dime	nsions rou	inded up to the next who	Specifica le millime	ations subject eter (inches ro	t to change witl ounded up to th	hout notice. ie next 1⁄8").		
			Pans	Cabinet Dimensions (mm)					Capacity		Crated Weight	
Model	Doors	Shelves	(top)	W**	D†	Н	HP	Voltage	Amps	(litres)	Refrigerant	(kg)
TSSU-27-08-HC	1	2	8	702	766	1093	1⁄4	220-240V/50-60Hz	1.6	215	R290	102

** Width does not include 4 mm each side for lid pins.

† Depth does not include 26 mm for rear bumpers.